



Deltaceir Line



DELTA CEIR Line is the linear solution of Deltaceir aluminium ceiling system, made up of modular panels which are fully downward demountable. With thin and very decorative "Δ" lines, this product features parallel profiles held by upper support bridges which placed over the panel will disappear when looking across the ceiling. The perfect solution for every project requiring exclusive design.

The closed shape of the blades drastically reduces the buildup of dust, and so the settling in the space of harmful products to one's health.

FEATURES

DELTA CEIR Line features 1200x600 mm modular panels, made of closed "Δ" profiles spaced at any interval (pitch) from 15 mm.

Profiles h30, 4 mm wide.

Profiles h20, 4 mm wide.

The modular panels, 1200x600 mm, are suspended from the concealed Delta suspension system. Upon request, special modules are available: width up to 1200 mm and length up to 1800 mm.

DELTA CEIR Line blades are made by BENDING SYSTEM, which gives:

the accuracy of profiles, more square edges and blades perfectly straight.

A wide range of finishes either from pre-painted or post-painted aluminium is available, according to the RAL, NCS, PANTONE and SIKKENS colours.

HINGE-DOWN PERFECT AND EASY

Each panel is fully downward demountable and can remain hinged-down in the springs without being totally removed.

The panels swing down from the short side (600 mm) and remain suspended at full length. Upon request, hinge-down from the long side (1200 mm) is possible too.

SUPPLY FORM

DELTA CEIR Line is usually supplied unassembled. It allows for easier packages and more economic transports. Upon request, the panels can also be supplied assembled.

FIRE REACTION

CEIR open cell ceilings are classified incombustible in compliance with international standards.

INSTALLATION





The concealed Delta suspension system allows for easy and fast placement or removal of DELTA CEIR Line.

The suspension system gives a trackless appearance and allows for demounting of the panels from below.


The minimum free space required for comfortable demounting is 80 mm only.

SPECIFICATION


Product:	DELTA CEIR Line
Supply form:	unassembled / assembled panels
Material:	0,40 mm. th. aluminium
Section blade:	"Δ", base 4 h30 or h20 mm.
Pitch:	at ... mm.
Panel size:	1200x600 mm. (standard)
Finish:	...
Suspension:	Delta system
Quantity:	... sq.m.

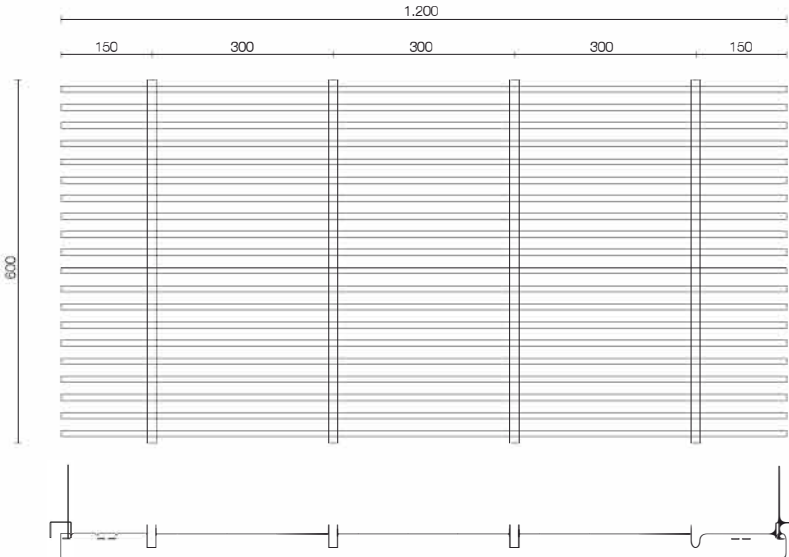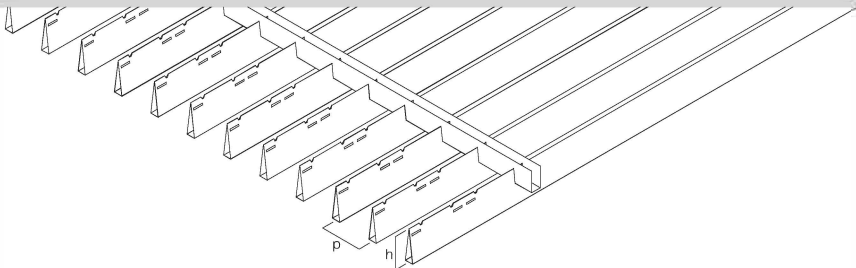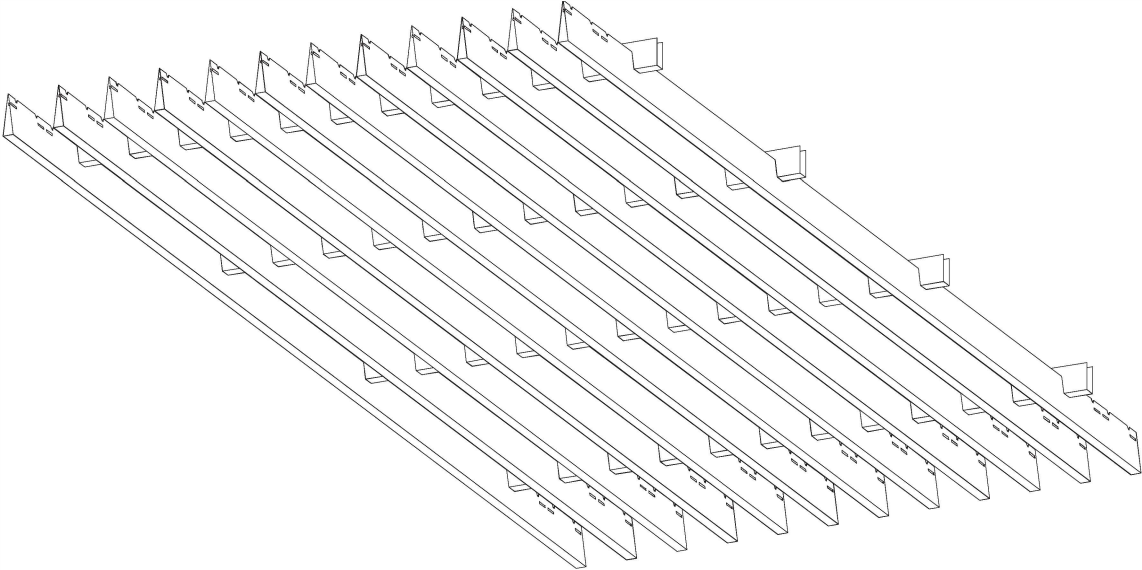


Deltaceir Line

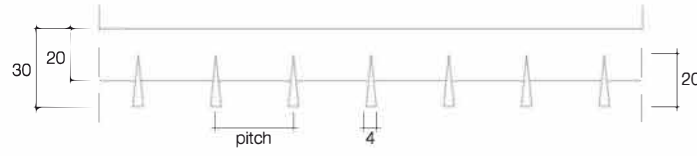

p	h
15	20
20	20
25	20
30	20

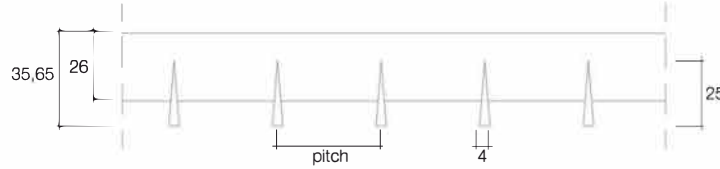


p	h
15	25
20	25
25	25
30	25

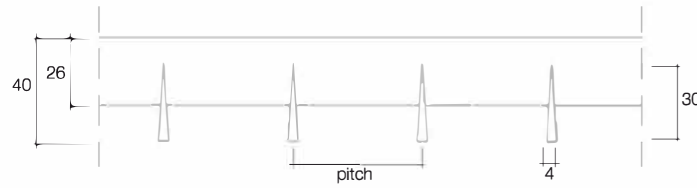

p	h
20	30
25	30
30	30
40	30
50	30

Montaj
Installation

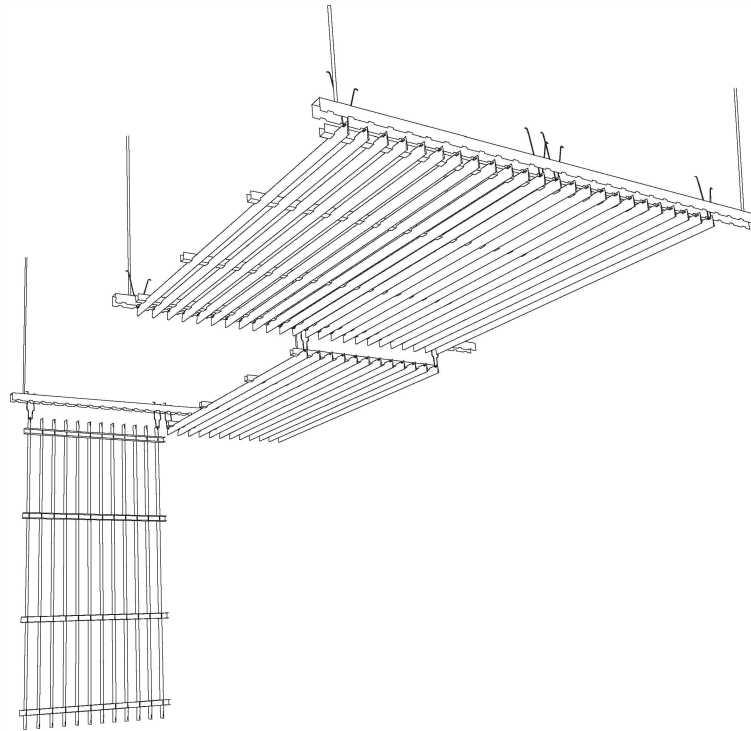

Montaj aksesuarları
Accessories for installation

Deltaceir Line - Delta standard sistem / Delta standard system

m ² sarfiyat tablosu components per sq.m.	birim unit	panel / panel 1200 x 600
D001 taşıyıcı kanal / suspension channel	lm	0,80
D002 taşıyıcı ekleme / coupler	pc	0,28
D003 taşıyıcı birleşim klipsi / spring	pc	5,56
D004 askı tiji / rod	pc	0,80
D010 panel destek profili / panel support bridge	pc	5,56